


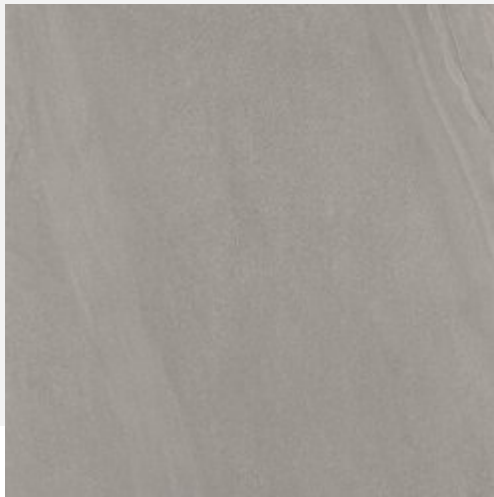

Technical Specifications

ABNT NBR ISO 13006

Dry-pressed ceramic tiles with low water absorption $E_v \leq 0,5\%$ Group B1a

Ms. Barcelona Antracita

Line Ms. Barcelona

Tipology	Code	
Glazed Porcelain Tile	203535E	
Format (cm)	Thickness (mm)	Work Size (cm)
90X180	7,00	89,85X179,85
Edge	Surface	
Rectified	Natural	

Physical Property

Test Standards

Results

Local of Use

CI - Commercial Light | RE - Residential | FA - Facade

Settlement

Dry Internal Walls Joint
Wet Internal Walls Joint
External Walls Joint - Facade
Floor joint

Recomendado

1,5 mm
1,5 mm
1,5 mm
1,5 mm

Reaction with fire: Ceramic coatings are sintered at high temperatures and therefore do not present in their final composition organic or volatile compounds of any nature, classifying them as Class I - non-combustible.

Portobello

Portobello SA - Fábrica | contato@portobello.com.br
SAC: 800 648 2002 1 BR 101 - Km 163 - Cx. Postal 15
Tijucas/SC - Brasil - 88200-000

